

# SUNNY CENTRAL 800CP XT / 850CP XT / 900CP XT



SC 800CP-10 / SC 850CP-10 / SC 900CP-10



## Profitable

- Up to 1 megawatt system power as standard
- Significantly reduced specific price thanks to increased power
- Maximum yields with low system costs

## Durable

- Full nominal power in continuous operation at ambient temperature up to +50 °C
- Direct installation on site, optimized for extreme climatic conditions between -40 °C and +62 °C
- Intelligent power management with OptiCool™

## Flexible

- Wide DC input voltage range for flexible use of various module configurations
- Perfectly adjusted for the temperature-dependent behavior of PV arrays

## Versatile

- All grid management functions are included, prepared for "Q at Night" including pure reactive power operation
- Customized computer platform for optimal monitoring and control of inverters

## SUNNY CENTRAL 800CP XT / 850CP XT / 900CP XT

The Expanded CP XT: Peak Output up to 1 Megawatt

For even more power: With its expanded functions, the new Sunny Central CP XT series is now even more powerful. At the same time, the specific price has fallen, meaning that maximum yields are achieved with lower system costs. As well as for full nominal power in continuous operation up to +50 °C, the Sunny Central CP XT is also optimized for cold temperatures down to -40 °C. The inverter includes all grid management functions and is prepared for Q at Night. The customized computer platform is designed for optimal monitoring and control.

# SUNNY CENTRAL


## 800CP XT / 850CP XT / 900CP XT

Technical Data	Sunny Central 800CP XT	Sunny Central 850CP XT
<b>Input (DC)</b>		
Max. DC power (@ $\cos \varphi = 1$ )	898 kW	954 kW
Min. input voltage / max. input voltage	500 V / 1,000 V	536 V / 1,000 V
$U_{MPP\_min}$ at $I_{MPP} < I_{DCmax}$	530 V	568 V
MPP voltage range (@ 25 °C / @ 50 °C at 50 Hz) <sup>1,2</sup>	641 to 850 V / 530 to 850 V	681 to 850 V / 568 to 850 V
MPP voltage range (@ 25 °C / @ 50 °C at 60 Hz) <sup>1,2</sup>	641 to 850 V / 530 to 850 V	681 to 850 V / 568 to 850 V
Rated input voltage	641 V	681 V
Max. input current	1,400 A	1,400 A
Number of independent MPP inputs	1	1
Number of DC inputs	9 / 32 (Optiprotect)	9 / 32 (Optiprotect)
<b>Output (AC)</b>		
Rated power (@ 25 °C) / nominal AC power (@ 50 °C)	880 kVA / 800 kVA	935 kVA / 850 kVA
Nominal AC voltage / nominal AC voltage range	360 V / 324 to 414 V	386 V / 348 to 443 V
AC power frequency / range	50 Hz, 60 Hz / 47 to 63 Hz	50 Hz, 60 Hz / 47 to 63 Hz
Rated power frequency / rated grid voltage	50 Hz / 360 V	50 Hz / 386 V
Max. output current / max. total harmonic distortion	1,411 A / 0.03	1,411 A / 0.03
Power factor at rated power / displacement power factor adjustable	1 / 0.9 leading to 0.9 lagging	
Feed-in phases / connection phases	3 / 3	3 / 3
<b>Efficiency<sup>3</sup></b>		
Max. efficiency / European efficiency / CEC efficiency	98.6% / 98.4% / 98.5%	98.6% / 98.4% / 98.5%
<b>Protective devices</b>		
Input-side disconnection device	Motor-driven load-break switch / circuit breaker (Optiprotect)	
Output-side disconnection device	AC circuit breaker	AC circuit breaker
DC overvoltage protection	Type I surge arrester	Type I surge arrester
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	Lightning Protection Level III
Stand-alone grid detection active / passive	● / -	● / -
Grid monitoring	●	●
Ground fault monitoring / remote-controlled ground fault monitoring	○ / ○	○ / ○
Insulation monitoring	○	○
Surge arrester for auxiliary power supply	●	●
Protection class (according to IEC 62103) / overvoltage category (according to IEC 60664-1)	I / III	I / III
<b>General data</b>		
Dimensions (W / H / D)	2,562 / 2,272 / 956 mm (101 / 89 / 38 inches)	
Weight in kg	1,900 kg / 4,200 lb	1,900 kg / 4,200 lb
Operating temperature range	-25 to +62 °C / -13 to +144 °F	
Noise emission <sup>4</sup>	61 dB(A)	61 dB(A)
Max. self-consumption (operation) <sup>5</sup> / self-consumption (night)	1,900 W / < 100 W	1,900 W / < 100 W
External auxiliary supply voltage	230 / 400 V (3 / N / PE)	230 / 400 V (3 / N / PE)
Cooling concept	OptiCool	OptiCool
Degree of protection: electronics / connection area (according to IEC 60529) / according to IEC 60721-3-4	IP54 / IP43 / 4C2, 4S2	IP54 / IP43 / 4C2, 4S2
Application in unprotected outdoor environments / indoor	● / ○	● / ○
Maximum permissible value for relative humidity (non-condensing)	15 to 95%	15 to 95%
Maximum operating altitude above MSL 2,000 m / 4,000 m	● / ○	● / ○
Fresh air consumption (inverter)	3,000 m <sup>3</sup> /h	3,000 m <sup>3</sup> /h
<b>Features</b>		
DC connection / AC connection	Ring terminal lug / screw terminal (Optiprotect) / ring terminal lug	
Display	HMI touch display	HMI touch display
Communication / protocols	Ethernet (optical fiber optional)	
Communication with Sunny String-Monitor	RS485 / none (Optiprotect)	RS485 / none (Optiprotect)
SC-COM / Plant monitoring	● / ○ (via Sunny Portal)	● / ○ (via Sunny Portal)
Color enclosure / door / base / roof	RAL 9016 / 9016 / 7004 / 7004	
Guarantee: 5 / 10 / 15 / 20 / 25 years	● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○
Configurable grid management functions	Power reduction, reactive power setpoint, dynamic grid support (e.g. LVRT)	
Certificates and approvals (more available on request)	EN 61000-6-2, EN 61000-6-4, EMC conformity, CE conformity, BDEW-MSRL / FGW / TR8 <sup>6</sup> , Arrêté du 23/04/08, R.D. 1663 / 2000, R.D. 661 / 2007, P.O. 12.3 / IEEE 1547 (SC 800CP only) <sup>7</sup>	
● Standard features ○ Optional features – Not available		
Type designation	SC 800CP-10	SC 850CP-10

- 1) At  $1.05 U_{AC, nom}$  and  $\cos \varphi = 1$
- 2) Further AC voltages, DC voltages and power classes can be configured (for more detailed information, see technical information "Innovations\_CP" at [www.SMA.de](http://www.SMA.de))
- 3) Efficiency measured without internal power supply
- 4) Sound pressure level at a distance of 10 m
- 5) Self-consumption at rated operation
- 6) With complete dynamic grid support
- 7) Designed and type-tested in accordance with IEEE 1547, serial tests optional available

Technical Data	Sunny Central 900CP XT	
<b>Input (DC)</b>		
Max. DC power (@ $\cos \varphi = 1$ )	1,010 kW	
Min. input voltage / max. input voltage	562 V / 1,000 V	
$U_{MPP, min}$ at $I_{MPP} < I_{DC, max}$	596 V	
MPP voltage range (@ 25 °C / @ 50 °C at 50 Hz) <sup>1, 2</sup>	722 to 850 V / 596 to 850 V	
MPP voltage range (@ 25 °C / @ 50 °C at 60 Hz) <sup>1, 2</sup>	722 to 850 V / 596 to 850 V	
Rated input voltage	722 V	
Max. input current	1,400 A	
Number of independent MPP inputs	1	
Number of DC inputs	9 / 32 (Optiprotect)	
<b>Output (AC)</b>		
Rated power (@ 25 °C) / nominal AC power (@ 50 °C)	990 kVA / 900 kVA	
Nominal AC voltage / nominal AC voltage range	405 V / 365 to 465 V	
AC power frequency / range	50 Hz, 60 Hz / 47 to 63 Hz	
Rated power frequency / rated grid voltage	50 Hz / 405 V	
Max. output current / max. total harmonic distortion	1,411 A / 0.03	
Power factor at rated power / displacement power factor adjustable	1 / 0.9 leading to 0.9 lagging	
Feed-in phases / connection phases	3 / 3	
<b>Efficiency<sup>3</sup></b>		
Max. efficiency / European efficiency / CEC efficiency	98.6% / 98.4% / 98.5%	
<b>Protective devices</b>		
Input-side disconnection device	Motor-driven load-break switch / circuit breaker (Optiprotect)	
Output-side disconnection device	AC circuit breaker	
DC overvoltage protection	Type I surge arrester	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Stand-alone grid detection active / passive	● / -	
Grid monitoring	●	
Ground fault monitoring / remote-controlled ground fault monitoring	○ / ○	
Insulation monitoring	○	
Surge arrester for auxiliary power supply	●	
Protection class (according to IEC 62103) / overvoltage category (according to IEC 60664-1)	I / III	
<b>General data</b>		
Dimensions (W / H / D)	2,562 / 2,272 / 956 mm (101 / 89 / 38 inches)	
Weight in kg	1,900 kg / 4,200 lb	
Operating temperature range	-25 to +62 °C / -13 to +144 °F	
Noise emission <sup>4</sup>	61 dB(A)	
Max. self-consumption (operation) <sup>5</sup> / self-consumption (night)	1,900 W / < 100 W	
External auxiliary supply voltage	230 / 400 V (3 / N / PE)	
Cooling concept	OptiCool	
Degree of protection: electronics / connection area (according to IEC 60529) / according to IEC 60721-3-4	IP54 / IP43 / 4C2, 4S2	
Application in unprotected outdoor environments / indoor	● / ○	
Maximum permissible value for relative humidity (non-condensing)	15 to 95%	
Maximum operating altitude above MSL 2,000 m / 4,000 m	● / ○	
Fresh air consumption (inverter)	3,000 m <sup>3</sup> /h	
<b>Features</b>		
DC connection / AC connection	Ring terminal lug / screw terminal (Optiprotect) / ring terminal lug	
Display	HMI touch display	
Communication / protocols	Ethernet (optical fiber optional)	
Communication with Sunny String-Monitor	RS485 / none (Optiprotect)	
SC-COM / Plant monitoring	● / ○ (via Sunny Portal)	
Color enclosure / door / base / roof	RAL 9016 / 9016 / 7004 / 7004	
Guarantee: 5 / 10 / 15 / 20 / 25 years	● / ○ / ○ / ○ / ○	
Configurable grid management functions	Power reduction, reactive power setpoint, dynamic grid support (e.g. LVRT)	
Certificates and approvals (more available on request)	EN 61000-6-2, EN 61000-6-4, EMC conformity, CE conformity, BDEW-MSRL / FGW / TR8 <sup>6</sup> , Arrêté du 23/04/08, R.D. 1663 / 2000, R.D. 661 / 2007, P.O. 12.3	
● Standard features   ○ Optional features   - Not available		
Type designation	SC 900CP-10	

Efficiency curve SUNNY CENTRAL 900CP XT

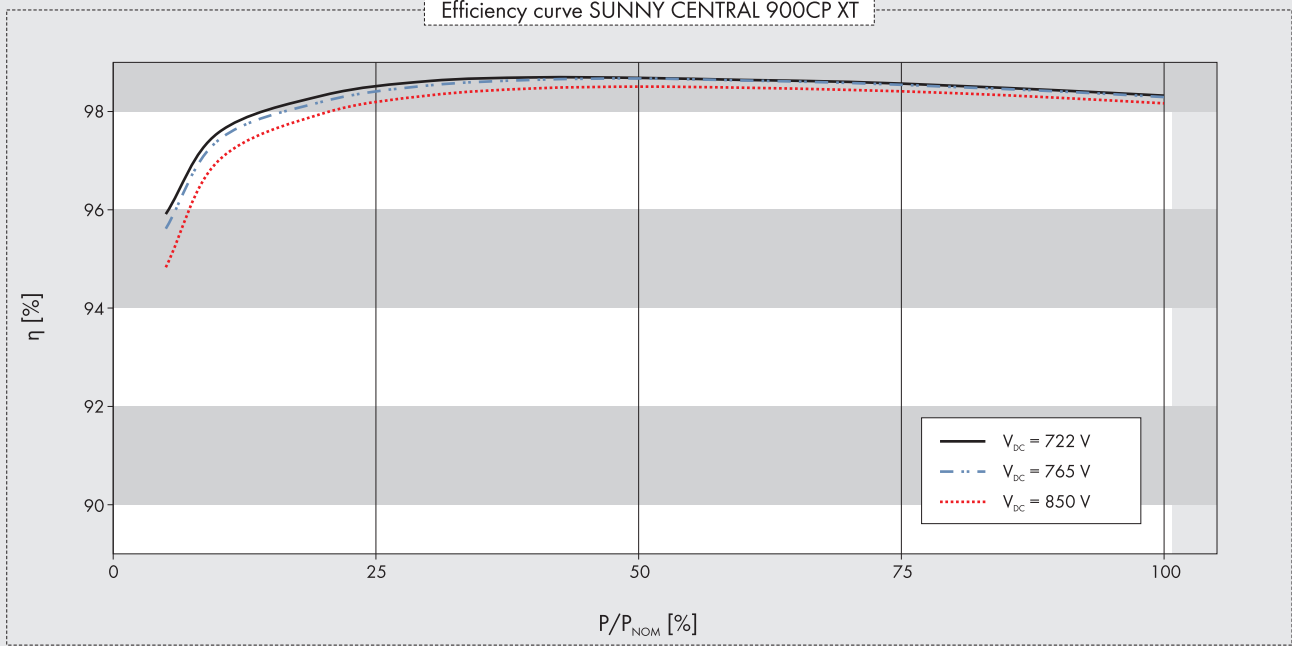

### PLANT DIAGRAM

